
8' Four-Tier Hot Chicken Merchandiser

Low Profile Hot Packaged Food Merchandiser

IP #WRGCL9637-AS-SRM-UO 8'-0" L x 38" D x 54" H

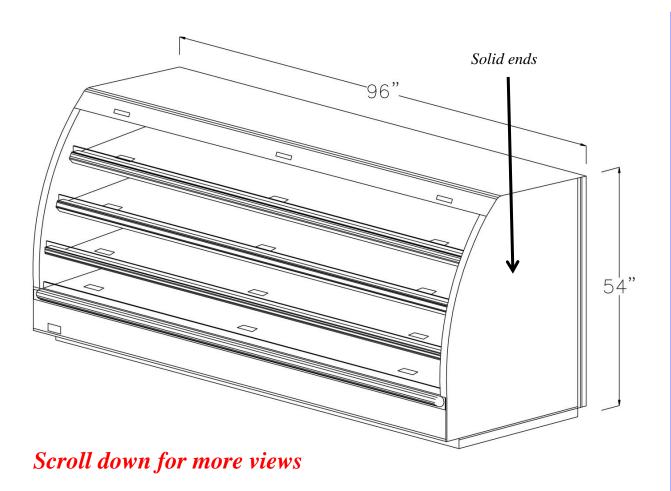

Approval – Complete All Sections

Colors:

Body: Stainless Steel Bumper: Black

Electric:

Voltage: 120/208V Phase: Three Source: Floor

Delivery

Site: Loading Dock ___ Ground Level ____

Delivery hours:

Depth of case is 38" which will fit through narrowest space between delivery point and install location. Yes ____ No ___ If no - CALL US ASAP

Approval signature: _____

Date:

See last page for specifications table – your signature above verifies the installation site has the required power as shown




888-MEAL-SOLUTIONS (888-632-5765) www.atlanticfoodbars.com

4-Tier Hot Chicken Merchandiser

Low Profile Hot Packaged Food Merchandiser

IP #WRGCL9637-AS-SRM-UO 8'-0" L x 38" D x 54" H

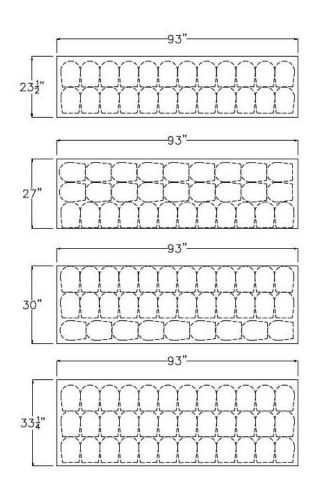


Chicken Dome Capacity

Details per sign off on page 1 and specifications on last page

Approval signature: _

Date: _____

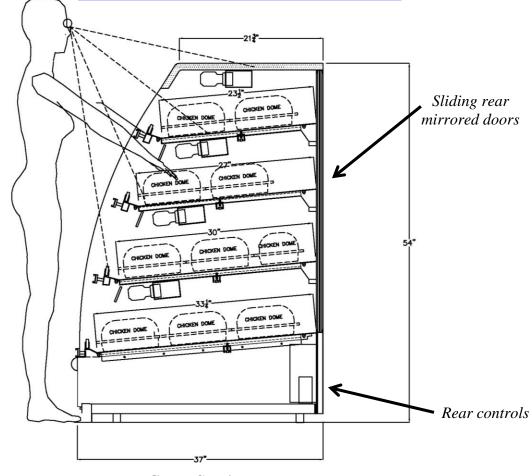

Cross Section

Internal Part #	Custom Description	Dimensions	Voltage	Amps 3 Ph	Rotisserie Dome Capacity
WRGCL9637-AS- SRM-UO	8' Four-Tier Hot Packaged Food Merchandiser	8'-0"L x 38" D x 54" H	120/208	39.7	123




www.atlanticfoodbars.com

End Cap 6 Well Soup Bar

IP #SW6036-AW3-FMC-ISW6-NPD-SCLD32-UO 60" L x 37" D x 34" H (Counter)

Shown with FRONT controls, napkin dispenser, spoon bin, 3 each built in cup dispensers and 2 each lid bins in slanted front panel

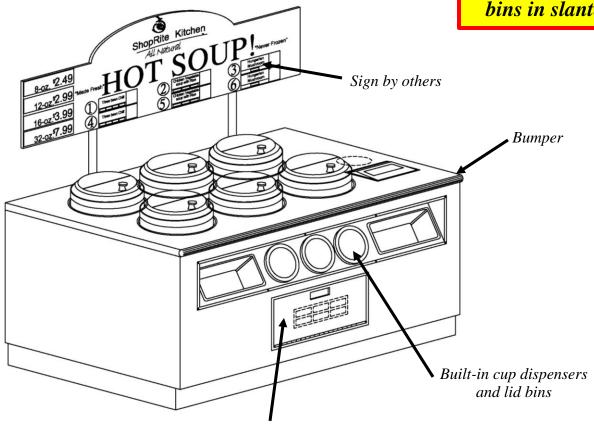

Front controls

Celebrating

SCROLL DOWN -PAGES 2-3 HAVE ADDITIONAL VIEWS

Approval – Complete All Sections

Colors:

Body: Stainless Steel

Bumper: Black

Countertop: Stainless Steel

Electric:

Voltage: 120V Phase: Single Source: Floor

Delivery

Site: Loading Dock Ground Level

Delivery hours:

Depth of case is 37" which will fit through narrowest space between delivery point and install location. Yes ___ No ___ If no – CALL US ASAP

Approval signature: _____

Date:

See last page for specifications table – your signature above verifies the installation site has the required power as shown


End Cap 6 Well Soup Bar

IP #SW6036-AW3-FMC-ISW6-NPD-SCLD32-UO 60" L x 37" D x 34" H (Counter)

Details per sign off on page 1 and specifications on last page

Approval signature:

Date:

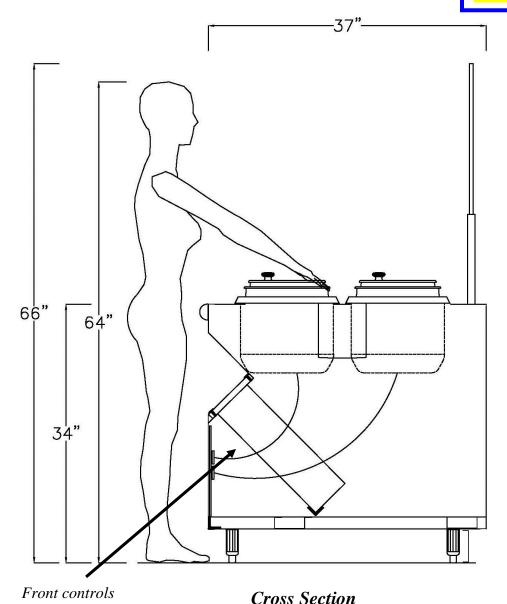


Shown with FRONT controls, napkin dispenser, spoon bin, 3 each built in cup dispensers and 2 each lid bins in slanted front panel

SCROLL DOWN –
PAGE 3 HAS
ADDITIONAL VIEWS



End Cap 6 Well Soup Bar

IP #SW6036-AW3-FMC-ISW6-NPD-SCLD32-UO 60" L x 37" D x 34" H (Counter)

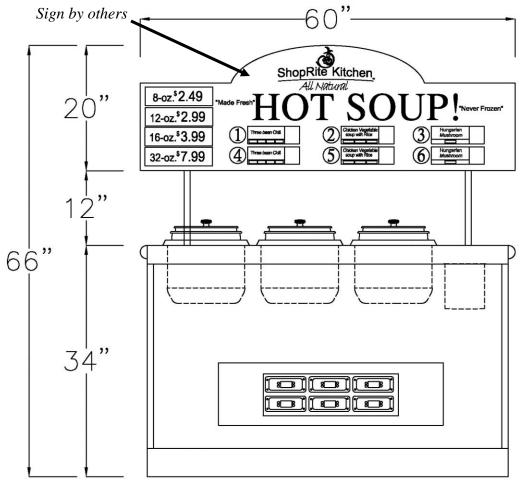


Shown with FRONT controls, napkin dispenser, spoon bin, 3 each built in cup dispensers and 2 each lid bins in slanted front

Details per sign off on page 1 and specifications on last page

Approval signature:

Date:

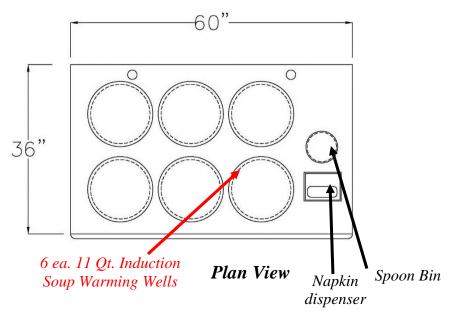

Front Elevation

Internal Part #	Custom Description	Dimensions	Voltage	Amps 1 Ph	11-qt Soup Well Capacity			
SW6036-AW3-FMC-ISW6- NPD-SCLD32-UO	5' Six-Well Soup Bar	60" L x 37" D x 34" H	120	12.5	6			
Maximum overcurrent protection = 20 amps								

